



# 落ちふた式 U形側溝

【縦断ボルト固定 G受枠付 T-25対応】

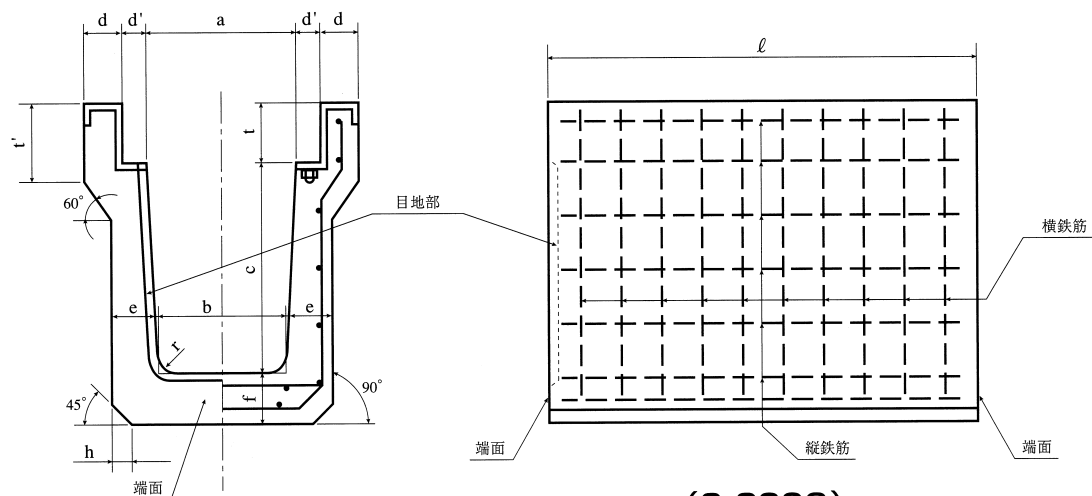

(3-300C)

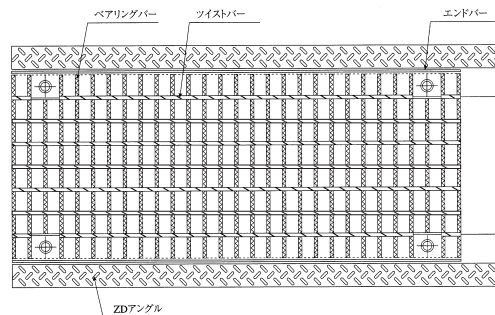

| 種類 | 呼び名  | 寸 法 (mm) |     |     |    |    |    |    |    |     |     |    |                    |
|----|------|----------|-----|-----|----|----|----|----|----|-----|-----|----|--------------------|
|    |      | a        | b   | c   | d  | d' | e  | f  | h  | t   | t'  | r  | ℓ                  |
| 3種 | 250  | 250      | 230 | 250 | 45 | 60 | 65 | 65 | 30 | 90  | 120 | 50 | 2000<br>又は<br>1000 |
|    | 300A | 300      | 280 | 300 | 50 | 60 | 70 | 70 | 30 | 95  | 140 | 50 |                    |
|    | 300B | 300      | 270 | 400 | 50 | 60 | 70 | 70 | 40 | 95  | 140 | 50 |                    |
|    | 300C | 300      | 260 | 500 | 50 | 60 | 80 | 80 | 40 | 95  | 140 | 50 |                    |
|    | 400A | 400      | 370 | 400 | 55 | 60 | 70 | 70 | 40 | 110 | 140 | 50 |                    |
|    | 400B | 400      | 360 | 500 | 55 | 60 | 80 | 80 | 40 | 110 | 140 | 50 |                    |
|    | 500A | 500      | 460 | 500 | 60 | 65 | 80 | 80 | 40 | 125 | 155 | 50 |                    |
|    | 500B | 500      | 450 | 600 | 60 | 65 | 90 | 90 | 40 | 125 | 175 | 50 |                    |

| 種類 | 呼び名  | 配筋         |        |        |            |        |        |      |           | 参考重量<br>(kg) |
|----|------|------------|--------|--------|------------|--------|--------|------|-----------|--------------|
|    |      | 横鉄筋        |        |        |            |        |        | 縦鉄筋  |           |              |
|    |      | 外側鉄筋       |        |        | 底版内鉄筋      |        |        | 径    | 数量<br>(本) |              |
|    |      | 径又は<br>呼び名 | 数量(本)  |        | 径又は<br>呼び名 | 数量(本)  |        |      |           |              |
|    |      |            | ℓ=2000 | ℓ=1000 |            | ℓ=2000 | ℓ=1000 |      |           |              |
| 3種 | 250  | 5.00       | 20     | 10     | 5.00       | 20     | 10     | 4.00 | 13        | 323          |
|    | 300A | 5.00       | 24     | 12     | 5.00       | 24     | 12     | 4.00 | 13        | 410          |
|    | 300B | D6         | 19     | 11     | D6         | 10     | 6      | 4.00 | 15        | 471          |
|    | 300C | D6         | 21     | 11     | D6         | 11     | 6      | 4.00 | 17        | 576          |
|    | 400A | D6         | 23     | 12     | D6         | 12     | 6      | 4.00 | 17        | 530          |
|    | 400B | D6         | 23     | 12     | D6         | 12     | 6      | 4.00 | 19        | 637          |
|    | 500A | D6         | 23     | 12     | D6         | 12     | 6      | 4.00 | 20        | 717          |
|    | 500B | D6         | 25     | 13     | D6         | 13     | 7      | 4.00 | 24        | 869          |